



TUFSEAL

CLEAR ACRYLIC SEALER



**COLOURLESS
SEALER**



**PROTECTS
SURFACE**



**REPELS
WATER**

DESCRIPTION

Davco Tufseal is a highly durable non-yellowing clear acrylic sealer.

Davco Tufseal is UV resistant and is ideal for interior and exterior usage.

USES

As a protective sealer on unglazed quarry tiles, slates, pavers, roof tiles, marble, terrazzo.

As a dustproofer onto concrete, precast concrete, masonry.

As a water repellent protection to brickwall and fairface brickwall.

Seals porous surface to prevent fungus and algae growth.

ADVANTAGES

Prevent migration of water stains, dirt, oil and grease.

Non-yellowing when exposed to sunlight.

Excellent water repelling characteristic.

Protect substrate against deterioration, weathering and carbonation.

Unaffected by most alkali, mild acid, oil, grease, detergent and some mild solvent.

SURFACE PREPARATION

For new or old substrates, surfaces should be free from dirt, grease, fungus/algae and any loose matter. Surface should be dry and free from stains.

New concrete surface should have a minimum of 7 days curing period before applying Davco Tufseal.

APPLICATION

Apply Davco Tufseal in corner of sample substrate to check for compatibility and change in tonality.

No mixing is required, just stir the material before use to prevent settlement due to storage and transportation.

Apply Davco Tufseal directly from the can.

Apply a minimum of 2 coats using brush, roller or spray.

For new concrete surfaces, seal and harden freshly laid concrete using Davco Tufseal.

Ensure the surface is dry before applying Davco Tufseal.

Allow the sealer to dry before trafficking.

Tack free-approx. 30 minutes.


Trafficable-approx. 2 hours.

Davco Tufseal will seal in dirt and stains if not removed prior to application.

Specifications are subject to change without notification. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation methods and site conditions.



PAREX
Building expertise, together

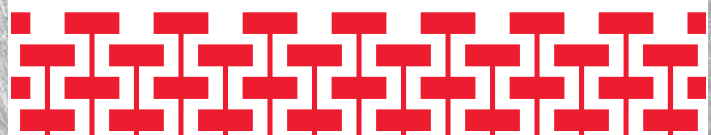



TUFSEAL

COVERAGE

Depending on the porosity of the surface to be applied, 8-10m² per litre (as a guide for concrete surface).

PRECAUTIONS

Davco Tufseal comes in gloss and matt version.

Davco Tufseal Gloss can be applied directly onto clean and sound substrate.

When applying with Davco Tufseal Matt, the product must be mixed well before use.

Prime substrate first with a coat of Davco Tufseal Gloss and allow it to dry before applying subsequent coats of Davco Tufseal Matt to the application area.

PACKAGING

Available in 208 litres, 20 litres, 5 litres and 1 litre containers.

SHELF LIFE

Shelf life of 12 months when stored in a cool dry place in unopened containers.

CLEANING

To clean up Davco Tufseal, use mineral turpentine.

HEALTH AND SAFETY

Protective gloves and goggles should be used when handling this product. In cases of eyes splashes or excessive skin contact, thoroughly flush with water. If any ill effects should occur, seek medical attention. Refer to safety data sheet.

Disclaimer

The use of this product is beyond the manufacturer's control and liability is restricted to the replacement of material proven faulty. The manufacturer is not responsible for any loss or damage arising from incorrect usage. Specifications are subjected to changes without prior notice. Before application, customers and users are requested to check that they have the latest version of this document from our website www.parexgroup.com.sg

PAREXGROUP PTE LTD

28 TUAS SOUTH AVENUE 8, SINGAPORE 637648

TEL: (65) 6861 0632 FAX: (65) 6862 3915

EMAIL: SALES@PAREXGROUP.COM.SG

WEBSITE: WWW.PAREXGROUP.COM.SG

ONLINE STORE: DAVCO-ONLINE.COM.SG

ParexGroup, a French multi-national company with headquarters in Paris, is a leading manufacturer of speciality products for the construction industry with operations in more than 20 countries, and our 2700 people around the world are the cornerstone of our growing organization.




Certificate SG09/02195



Certificate SG95/06111



Certificate SG09/50075



Updated TM36 Mar 2016

